

Setting up the No-IP DDNS Service for ICRealtime


We will first have to create an account through www.no-ip.com. Once at the website click on “Create Account” where the User Login input boxes are located. You will now see the following screen below. Fill in all necessary information making sure the e-mail address you are using is valid since the site will be sending it an activation notice.




The screenshot shows the No-IP website's account creation page. At the top, there is a navigation bar with the No-IP logo and the tagline "The DNS Service Provider". The navigation menu includes links for Home, Download, Services, Support, and Company. A prominent blue banner reads "No-IP is Free, Sign up Now!". Below this, there is a breadcrumb trail: Home > Free Sign Up. The main heading is "Create Your No-IP Account", with a link to "sign in here" for existing users. The form is divided into two sections: "Account information:" and "About You:". The "Account information:" section includes fields for Email, Password, and Confirm Password. The "About You:" section includes fields for First Name, Last Name, a dropdown menu for "How did you hear about us?" (set to "- Select One -"), and a field for Zip/Postal Code.

After successfully signing up, check your e-mail for an activation message to confirm your registration to the site. Once confirmed, you should now be able to login through No-IP's homepage and get to your member console by clicking the “Your No-IP” option at the top of the page.

Now that you have your account created we have to generate a host for the DVR to update its WAN IP address on. Click the “Manage Hosts” icon when your member console opens. Then click the “Add a Host” button on the following screen.

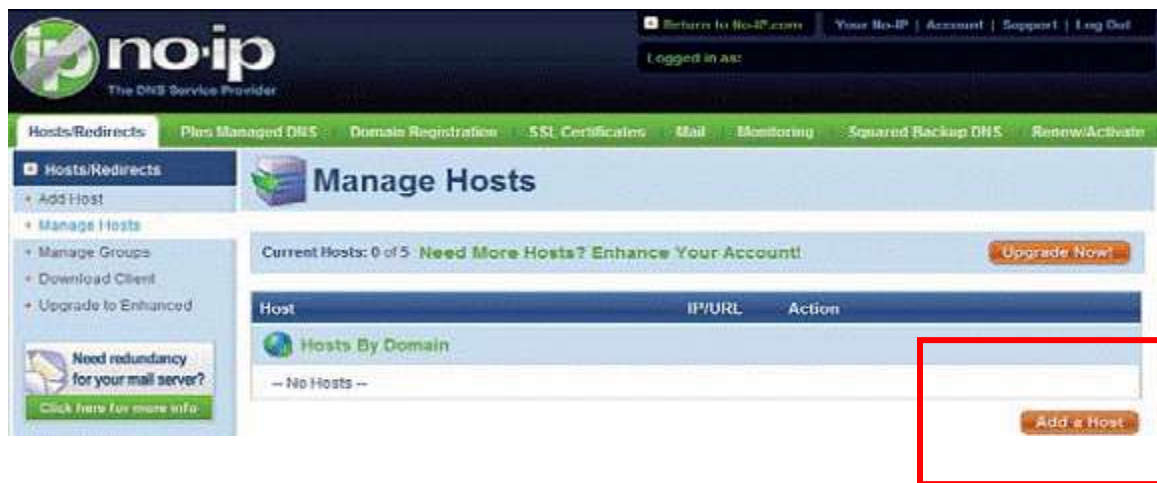

The first question it asks you is to create a host name. Fill in a unique name followed with a pre determined domain on the right. This will form the complete host name you will be using to access the DVR from now on.

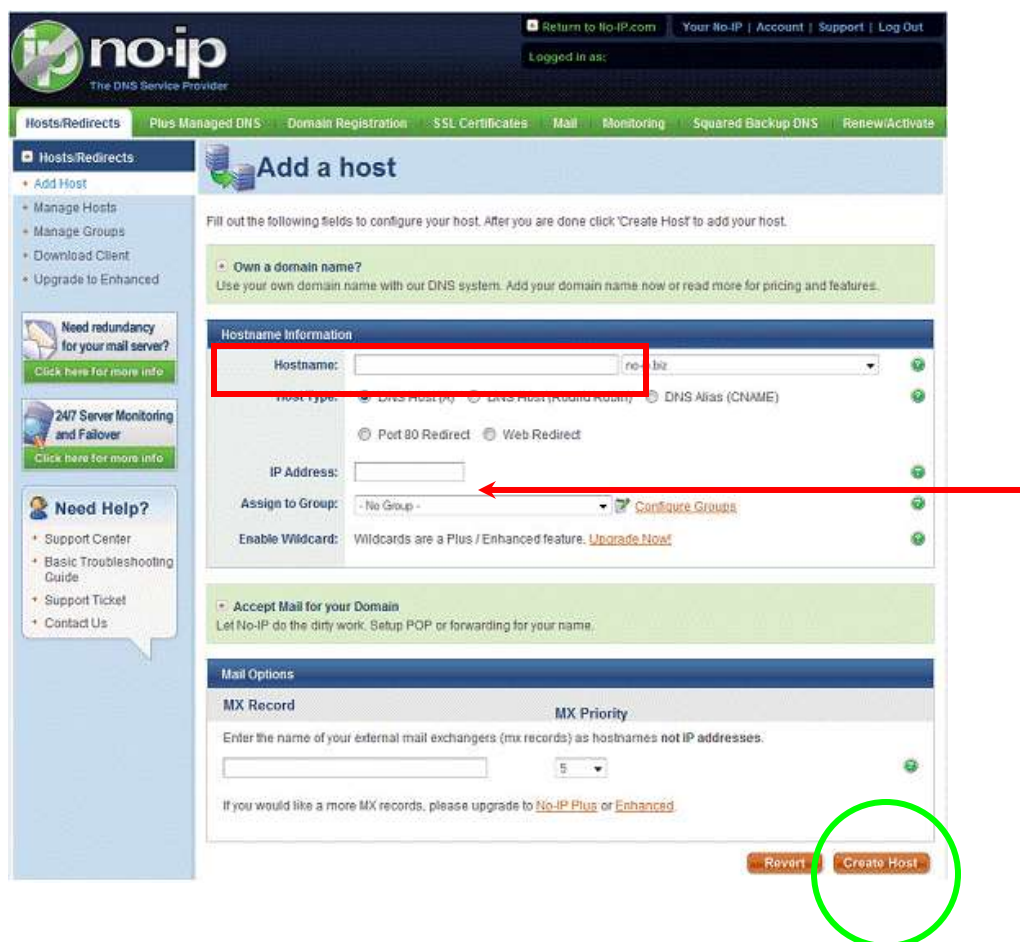

This set-up should be done at the site where the DVR is located at. No-IP will automatically fill in the IP address from the location you are at. Once the DVR and the site communicate, the DVR will update this address as needed due to any IP changes. Click on “Create Host” to Finish.

Things to Remember

- Make sure to write down the Host Name for the DVR you created.
- Write and keep the password you used to create the No-IP service.
- If you receive a message that your site is about to expire, make sure to renew it so you don't have to set-up this service again.
- No-IP offers enhanced services for a small yearly fee that makes the IP address a bit more permanent

Please see the Guide on “Setting up the ICREaltime DVR” for entering this information from No-IP.com into your DVR for the DDNS service.